


ANSI Standard - Flange Pressure Rating 150 lbs / 600 lbs

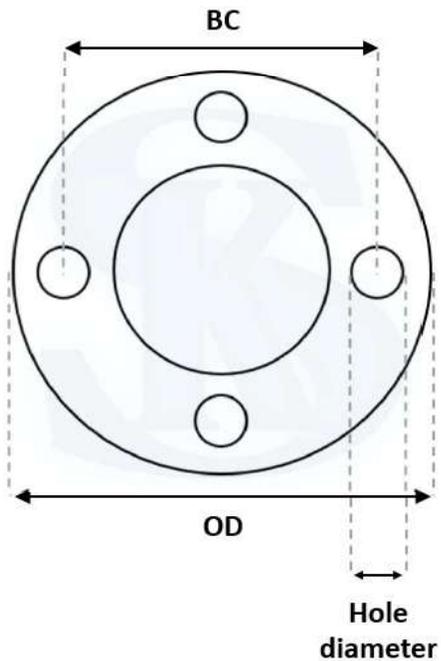

| Size | 150 lbs | | | 600 lbs | | |
|--------|---------|------|---------|---------|------|---------|
| | O.D. | B.C. | HOLES | O.D. | B.C. | HOLES |
| 1/2" | 89 | 60 | 4 X 16 | 95 | 67 | 4 X 16 |
| 3/4" | 99 | 70 | 4 X 16 | 117 | 82 | 4 X 19 |
| 1" | 108 | 80 | 4 X 16 | 124 | 89 | 4 X 19 |
| 1-1/4" | 118 | 89 | 4 X 16 | 133 | 98 | 4 X 19 |
| 1-1/2" | 127 | 98 | 4 X 16 | 156 | 114 | 4 X 22 |
| 2" | 152 | 121 | 4 X 20 | 165 | 127 | 8 X 19 |
| 2-1/2" | 178 | 140 | 4 X 20 | 190 | 149 | 8 X 23 |
| 3" | 190 | 152 | 4 X 20 | 210 | 168 | 8 X 23 |
| 4" | 229 | 190 | 8 X 20 | 273 | 216 | 8 X 26 |
| 5" | 254 | 216 | 8 X 23 | 330 | 266 | 8 X 29 |
| 6" | 279 | 241 | 8 X 23 | 355 | 292 | 12 X 29 |
| 8" | 343 | 298 | 8 X 23 | 419 | 349 | 12 X 32 |
| 10" | 406 | 362 | 12 X 26 | 508 | 432 | 16 X 35 |
| 12" | 482 | 431 | 12 X 26 | 558 | 489 | 20 X 35 |
| 14" | 533 | 476 | 12 X 28 | 603 | 527 | 20 X 38 |
| 16" | 597 | 540 | 16 X 29 | 685 | 603 | 20 X 42 |
| 18" | 635 | 578 | 16 X 32 | 745 | 654 | 20 X 45 |
| 20" | 698 | 635 | 20 X 32 | 812 | 733 | 24 X 45 |
| 22" | 749 | 692 | 20 X 35 | | | |
| 24" | 813 | 749 | 20 X 35 | 940 | 838 | 24 X 51 |

Holes = number x diameter (mm)