


JIS Standard - Flange Pressure Rating 5K / 10K / 20K / 40K

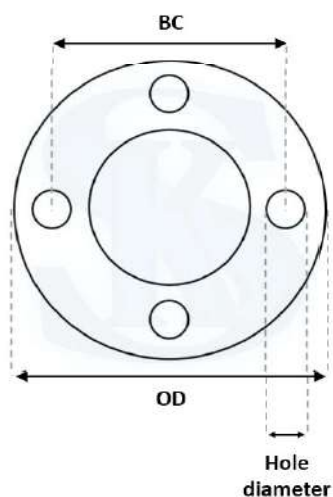

Size	5K			10K			20K			40K		
	O.D.	B.C.	HOLES	O.D.	B.C.	HOLES	O.D.	B.C.	HOLES	O.D.	B.C.	HOLES
10	75	55	4 X 12	90	65	4 X 15	90	65	4 X 15	110	75	4 X 19
15	80	60	4 X 12	95	70	4 X 15	95	70	4 X 15	115	80	4 X 19
20	85	65	4 X 12	100	75	4 X 15	100	75	4 X 15	120	85	4 X 19
25	95	75	4 X 12	125	90	4 X 19	125	90	4 X 19	130	95	4 X 19
32	115	90	4 X 15	135	100	4 X 19	135	100	4 X 19	140	105	4 X 19
40	120	95	4 X 15	140	105	4 X 19	140	105	4 X 19	160	120	4 X 23
50	130	105	4 X 15	155	120	4 X 19	155	120	8 X 19	165	130	8 X 19
65	155	130	4 X 15	175	140	4 X 19	175	140	8 X 19	200	160	8 X 23
80	180	145	4 X 19	185	150	8 X 19	200	160	8 X 23	210	170	8 X 23
100	200	165	8 X 19	210	175	8 X 19	225	185	8 X 23	250	205	8 X 25
125	235	200	8 X 19	250	210	8 X 23	270	225	8 X 25	300	250	8 X 27
150	265	230	8 X 19	280	240	8 X 23	305	260	12 X 25	355	295	12 X 33
175	300	260	8 X 23	305	265	12 X 23						
200	320	280	8 X 23	330	290	12 X 23	350	305	12 X 25	405	345	12 X 33
250	385	345	12 X 23	400	355	12 X 25	430	380	12 X 27	475	410	12 X 33
300	430	390	12 X 23	445	400	16 X 25	480	430	16 X 27	540	470	16 X 39
350	480	435	12 X 25	490	445	16 XX25	540	480	16 X33	585	515	16 X 39
400	540	495	16 X 25	560	510	16 X 27	605	540	16 X 33	645	570	16 X 39
450	605	555	16 X 25	620	565	20 X 27	675	605	20 X 33			
500	655	605	20 X 25	675	620	20 X 27	730	660	20 X 33			
550	720	665	20 X 27	745	680	20 X 33	795	720	20 X 39			
600	770	715	20 X 27	795	730	24 X 33	845	770	24 X 39			
650	825	770	24 X 27	845	780	24 X 33	945	850	24 X 48			
700	875	820	24 X 27	905	840	24 X 33	995	900	24 X 48			
750	945	880	24 X 33	970	900	24 X 33	1080	970	24 X 56			
800	995	930	24 X 33	1020	950	28 X 33	1140	1030	24 X 56			
850	1045	980	24 X 33	1070	1000	28 X 33	1200	1090	24 X 56			
900	1095	1030	24 X 33	1120	1050	28 X 33	1250	1140	28 X 56			
1000	1195	1130	28 X 33	1235	1160	28 X 39						

Holes = number x diameter (mm)